


JOB:

ITEM #:

QUANTITY:

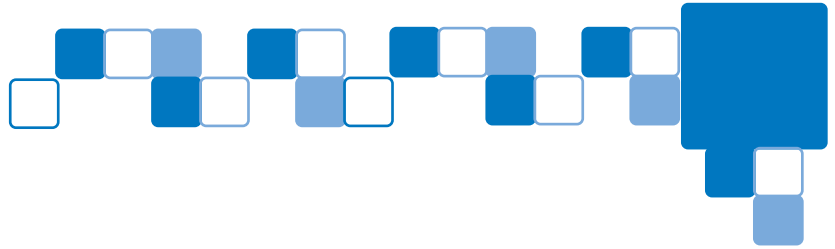

Can Racks

Stationary & Mobile

Convenient Can Access

Eliminate searching through piles and piles of unorganized stock and crowded shelves. Our can racks provide easy product access and selection for convenient inventory control. By providing automatic stock rotation when loaded from the rear, the inclined extended angle glides give you easy access to a large number of cans with one unit.

Sanitary

Each unit is all welded with all seams fully welded and sealed providing a smooth, easy to clean surface. No cracks or crevices to trap dirt!

Guaranteed

Like all of our products, our Can Racks are built to last... We Guarantee It! Each unit carries a **Lifetime Guarantee** against rust and corrosion as well as a **Five-Year Guarantee** against material defects and workmanship.



#1250 Can Rack



NSF Certified
0503


C
A
N
R
A
C
K
S
•
F
U
L
L
S
I
Z
E



Aluminum Food Handling, Storage, & Transport Solutions

New Age Industrial Corp., Inc. • 1000 E Hwy-36 • PO Box 520 • Norton, Kansas 67654

Phone#: 800.255.0104 • 785.877.5121 • Fax#: 877.877.7687 • 785.877.2616 • www.newageindustrial.com

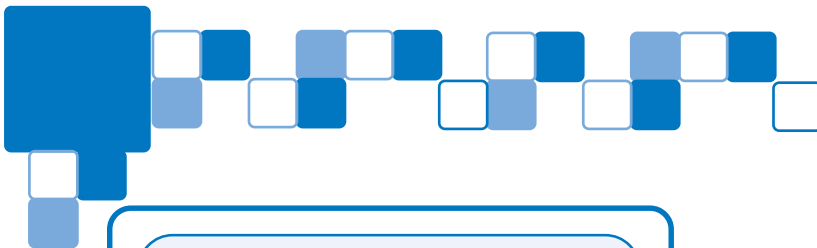

CAN RACKS • FULL SIZE

JOB:
ITEM #:
QUANTITY:

SPECIFICATIONS



CONSTRUCTION: All welded (6463-T5) type alloy construction consisting of heavy duty tubing uprights and cross braces with can guides of "T" and angle.

UPRIGHTS & CROSS BRACES: Vertical uprights are constructed of 1-1/4" x 1-1/2" x .070" wall extruded aluminum tubing to which horizontal cross braces of 1" x 1" x .070 wall aluminum tubing are welded.

CAN GUIDES: Guides are constructed of 1-1/4" x 1-1/4" x .100 thick angle and 1-1/4" x 2-1/4" x .100 thick "T" with front and rear edges turned up 3/4". The guides are welded to the cross braces on 7-3/8" centers; the rear of each guide is positioned 1" higher than the front to allow cans to roll forward.

ADJUSTABLE FEET: Stationary racks are mounted on four threaded stem type adjustable feet.

CASTERS (#1250CK & 1256CK): Includes four 6" plate type casters, two swivel with brake (#C495) and two rigid (#C500) with wheels of non marking polyolefin with a weight capacity of 750# each.

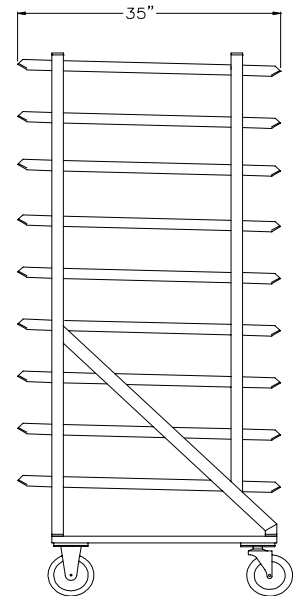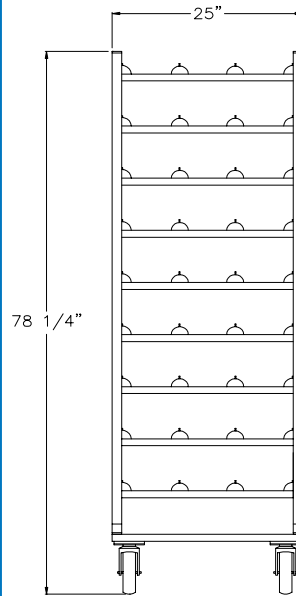

Model #1250CK

(Note that casters are factory installed ONLY)

Options

SHELF INSERT: Removable aluminum shelf insert (Model #1255) fits into can guides for storing cans smaller than No.5 and No.10 sizes. *Designed to fit 35" deep can racks only.*



NSF Certified

Model No.	Size W-H-D	Can Capacity				Ship Wt.	
		#10	#5	#2 1/2	#303 Casters		
1250*	25" x 71" x 35"	162	216	**	**	No	80#
1250CK	25" x 78-1/4" x 35"	162	216	**	**	Yes	112#
1251*	23" x 66" x 35"	**	**	352	484	No	80#
1254*	25" x 71-3/4" x 35"	**	288	**	**	No	72#
1256*	25-1/2" x 71" x 47"	216	297	**	**	No	100#
1256CK	25-1/2" x 78-1/4" x 47"	216	297	**	**	Yes	128#

* Units without casters are equipped with NSF Certified adjustable feet.

Items Must Ship Common Carrier

OPTIONS:

- 1255 Solid Shelf Trays (3)
- 0118 Adjustable Feet - Replacement

Aluminum Food Handling, Storage, & Transport Solutions

PHONE#: 800.255.0104 • 785.877.5121 • FAX#: 877.877.7687 • 785.877.2616