


JOB:

ITEM #:

QUANTITY:

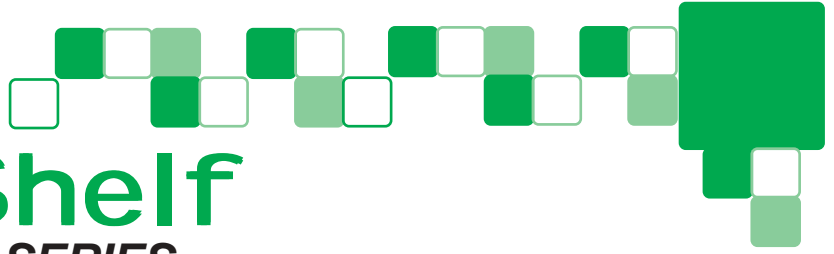

# Adjust-A-Shelf

**H.D. SERIES**

## Built To Organize Large, Heavy Loads

Approved for use in freezers, displays, as well as packaging and storage areas, these heavy duty aluminum shelves keep heavier product organized. With a weight capacity of 2000# per shelf, these units will hold almost anything!

## Design Your Own Custom Unit

All four series of "Adjust-A-Shelf" Shelving, the same length and width are interchangeable. This allows you to custom make your own complete units with the type of shelving (H.D., T-Bar, Solid) you need. Each unit assembles in minutes with only an allen wrench.

## Guaranteed To Last

Guaranteed to last, each rack carries a **Lifetime Guarantee** against rust and corrosion as well as a **Lifetime Guarantee** against material defects and workmanship.


## Mobile Units -- Optional

Make your unit mobile by adding a 5" caster upgrade. Easily installed, the swivel stem type casters will take your shelving unit where it needs to go.



With weight capacities at one ton (2000#) per shelf, these units will hold almost anything!

Unique "dunnage style" bar design keeps large product loads organized and off of the floor.

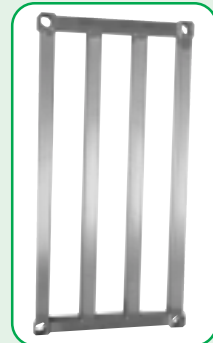

NSF Certified

A  
D  
J  
U  
S  
T  
-  
A  
-  
S  
H  
E  
L  
F  
.  
H  
E  
A  
V  
Y  
D  
U  
T  
Y  
S  
E  
R  
I  
E  
S



Aluminum Food Handling, Storage, & Transport Solutions

New Age Industrial Corp., Inc. • 1000 E Hwy-36 • PO Box 520 • Norton, Kansas 67654

Phone#: 800.255.0104 • 785.877.5121 • Fax#: 877.877.7687 • 785.877.2616 • www.newageindustrial.com



JOB:

ITEM #:

QUANTITY:

## SPECIFICATIONS

**SHELVES:** Bar shelves are constructed of 1-1/2" x 1-3/4" x .070 wall aluminum tubing welded into a rectangular frame with lengthwise laterals (spaced approximately 4" apart) welded inside. Each shelf corner has a heavy duty extruded aluminum collar permanently welded in place which accommodates the upright. A stainless steel screw is provided in each collar to lock the shelf at the desired height.


**LOAD CAPACITY:** The load capacity for each shelf is 2000#. Recommended load capacity for mobile units is 1200# gross cart weight.

**POSTS:** -- *Sold Separately* The uprights are extruded aluminum pipe (6063-T5 alloy) with an outside diameter of 1-5/16" and a wall thickness of .150. Each upright is marked in two inch increments and fitted with plastic caps in each end.

**CASTERS:** -- *Sold Separately* Uprights can be fitted with four stem type 5" swivel casters, two with brake. Rated capacity per caster is 300#.



**NSF Certified**

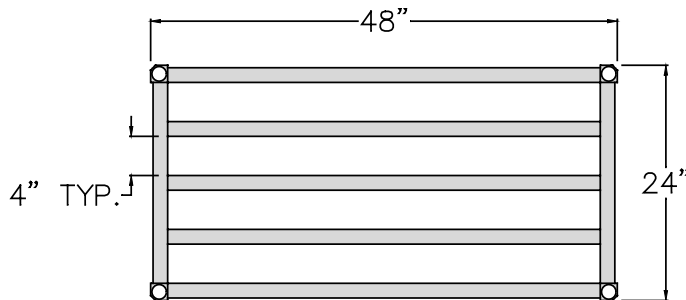

#2448HD Shelf

## Individual H.D. Shelves

Model No.	Size D-L	# Of Lat.	Ship Wt.
°1530HD	15" x 30"	3	5#
°1536HD	15" x 36"	3	6#
°1542HD	15" x 42"	3	7#
°1548HD	15" x 48"	3	8#
°1554HD	15" x 54"	3	9#
°1560HD	15" x 60"	3	9.5#
°1566HD	15" x 66"	3	10#
°1572HD	15" x 72"	3	11#
°1830HD	18" x 30"	4	7#
°1836HD	18" x 36"	4	8#
°1842HD	18" x 42"	4	9#
°1848HD	18" x 48"	4	10#
°1854HD	18" x 54"	4	11#
°1860HD	18" x 60"	4	12#
°1866HD	18" x 66"	4	13#
°1872HD	18" x 72"	4	14#
°2030HD	20" x 30"	4	7#
°2036HD	20" x 36"	4	8#
°2042HD	20" x 42"	4	9#
°2048HD	20" x 48"	4	10#
°2054HD	20" x 54"	4	11#
°2060HD	20" x 60"	4	12#
°2066HD	20" x 66"	4	13#
°2072HD	20" x 72"	4	14#
°2096HD*	20" x 96"	4	19#
°2430HD	24" x 30"	5	9#
°2436HD	24" x 36"	5	10#
°2442HD	24" x 42"	5	11#
°2448HD	24" x 48"	5	12#
°2454HD	24" x 54"	5	14#
°2460HD	24" x 60"	5	15#
°2466HD	24" x 66"	5	16#
°2472HD	24" x 72"	5	17#
°2496HD*	24" x 96"	5	24#
°3030HD	30" x 30"	6	10.5#
°3036HD	30" x 36"	6	12#
°3048HD	30" x 48"	6	15#

\* 96" Shelves Require 6 Posts.

° **UPS-able**

### Posts

Model No.	Length	Ship Wt.
° 12P	12"	.6#
° 34P	34"	2#
° 48P	48"	2.5#
° 54P	54"	3#
° 68P	68"	3.5#
° 72P	72"	3.5#
° 76P	76"	4#
° 84P	84"	4.5#

Capped aluminum pipe (1-5/16" o.d.). Marked in 2" increments.

° **All Items Are UPS-able**