


JOB:

ITEM #:

QUANTITY:

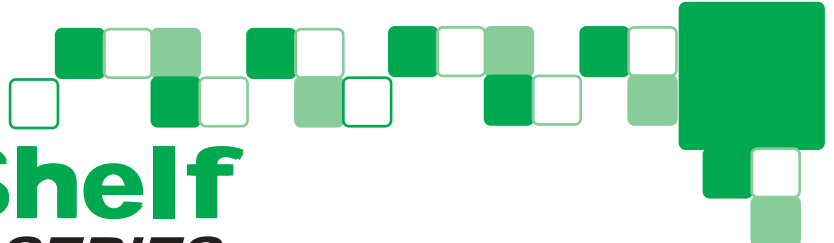

Adjust-A-Shelf

SOLID BRUTE SERIES

A
D
J
U
S
T
-
A
-
S
H
E
L
F
.
S
O
L
I
D
B
R
U
T
E
S
E
R
I
E
S

Specifically Designed For Smaller, Lighter Products

This solid shelf with reinforced bars and removable solid top provides a flat, smooth surface. Approved for use in freezers, displays, as well as packaging and storage areas, these heavy duty aluminum shelves get smaller product organized with a weight capacity of 800# per shelf. Unique removable top permits easy clean-up while the reinforced under-bracing gives added support.

Design Your Own Custom Unit

All four series of "Adjust-A-Shelf" Shelving, the same length and width are interchangeable. This allows you to custom make your own complete units with the type of shelving (H.D., T-Bar, Solid) you need. Each unit assembles in minutes with only an allen wrench.

Guaranteed To Last

Guaranteed to last, each rack carries a **Lifetime Guarantee** against rust and corrosion as well as a **Lifetime Guarantee** against material defects and workmanship.

Mobile Units -- Optional

Make your unit mobile by adding a 5" caster upgrade. Easily installed, the swivel stem type casters will take your shelving unit where it needs to go.



Unique removable top permits easy clean-up while the reinforced under-bracing gives added support.





JOB:

ITEM #:

QUANTITY:

SPECIFICATIONS

SHELVES: The solid shelf is press formed from a single sheet of .040 aluminum sheet with edge flanged down 1-3/4" on all four sides. Reinforcing angle tube and strap are welded to an extruded aluminum collar which is permanently welded in place which accommodates the post. A stainless steel set screw is provided in each collar to lock the shelf at the desired height on the post.


LOAD CAPACITY: The load capacity for each shelf is 800#. Recommended load capacity for mobile units is 1200# gross cart weight.

POSTS: -- Sold Separately The uprights are extruded aluminum pipe (6063-T5 alloy) with an outside diameter of 1-5/16" and a wall thickness of .150. Each upright is marked in two inch increments and fitted with plastic caps in each end.

CASTERS: -- Sold Separately Uprights can be fitted with four stem type 5" swivel casters, two with brake. Rated capacity per caster is 300#.



NSF Certified

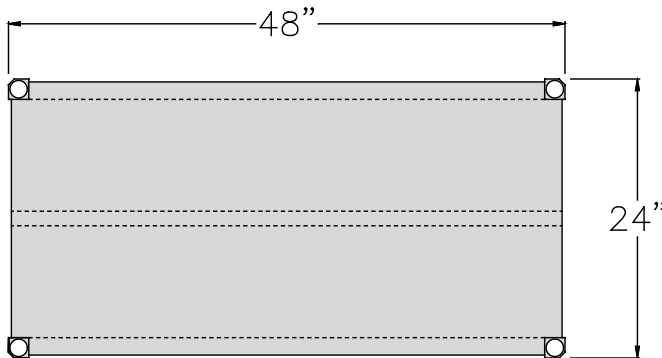

#2448SB Shelf

Individual Solid Brute Shelves

Model No.	Size D-L	Ship Wt.
◦ 1530SB	15" x 30"	8#
◦ 1536SB	15" x 36"	9.5#
◦ 1542SB	15" x 42"	10.5#
◦ 1548SB	15" x 48"	11.5#
◦ 1554SB	15" x 54"	13#
◦ 1560SB	15" x 60"	14#
◦ 1830SB	18" x 30"	9#
◦ 1836SB	18" x 36"	10#
◦ 1842SB	18" x 42"	11.5#
◦ 1848SB	18" x 48"	12.5#
◦ 1854SB	18" x 54"	14#
◦ 1860SB	18" x 60"	15#
◦ 1872SB	18" x 72"	17.5#
◦ 2030SB	20" x 30"	9#
◦ 2036SB	20" x 36"	10.5#
◦ 2042SB	20" x 42"	11.5#
◦ 2048SB	20" x 48"	13#
◦ 2054SB	20" x 54"	14#
◦ 2060SB	20" x 60"	15.5#
◦ 2066SB	20" x 66"	16.5#
◦ 2072SB	20" x 72"	18#
◦ 2430SB	24" x 30"	10#
◦ 2436SB	24" x 36"	11.5#
◦ 2442SB	24" x 42"	13#
◦ 2448SB	24" x 48"	14#
◦ 2454SB	24" x 54"	15.5#
◦ 2460SB	24" x 60"	16.5#
◦ 2466SB	24" x 66"	18#
◦ 2472SB	24" x 72"	19.5#

◦ All Items Are UPS-able

Posts

Model No.	Length	Ship Wt.
◦ 12P	12"	6#
◦ 34P	34"	2#
◦ 48P	48"	2.5#
◦ 54P	54"	3#
◦ 68P	68"	3.5#
◦ 72P	72"	3.5#
◦ 76P	76"	4#
◦ 84P	84"	4.5#

Capped aluminum pipe (1-5/16" o.d.). Marked in 2" increments.

◦ All Items Are UPS-able