

JOB:

ITEM #:

QUANTITY:

Adjust-A-Shelf

SOLID SERIES

Specifically Designed For Small Product Organization

Approved for use in freezers, displays, as well as packaging and storage areas, these lighter duty aluminum shelves get smaller product organized with a weight capacity of 400# per shelf. Unique marine edge design permits easy cleanup and minimizes the mess of "leaky" products.

Design Your Own Custom Unit

All four series of "Adjust-A-Shelf" Shelving, the same length and width are interchangeable. This allows you to custom make your own complete units with the type of shelving (H.D., T-Bar, Solid) you need. Each unit assembles in minutes with only an allen wrench.

Guaranteed To Last

Guaranteed to last, each rack carries a **Lifetime Guarantee** against rust and corrosion as well as a **Lifetime Guarantee** against material defects and workmanship.

Mobile Units -- Optional

Make your unit mobile by adding a 5" caster upgrade. Easily installed, the swivel stem type casters will take your shelving unit where it needs to go.



Unique marine edge design permits easy cleanup and minimizes the mess of "leaky" products.

400 lb Wt. Capacity per shelf



NSF Certified

ADJUST-A-SHELF • SOLID SERIES



Aluminum Food Handling, Storage, & Transport Solutions

New Age Industrial Corp., Inc. • 1000 E Hwy-36 • PO Box 520 • Norton, Kansas 67654

Phone#: 800.255.0104 • 785.877.5121 • Fax#: 877.877.7687 • 785.877.2616 • www.newageindustrial.com



JOB:

ITEM #:

QUANTITY:

SPECIFICATIONS

SHELVES: The solid shelf is press formed from a single sheet of .040 aluminum sheet with double thick marine edge flanged down 1-³/₄" on all four sides. Each shelf corner has a heavy duty extruded aluminum collar permanently welded in place which accommodates the post. A stainless steel set screw is provided in each collar to lock the shelf at the desired height on the post.


LOAD CAPACITY: The load capacity for each shelf is 400#. Recommended load capacity for mobile units is 1200# gross cart weight.

POSTS: -- Sold Separately The uprights are extruded aluminum pipe (6063-T5 alloy) with an outside diameter of 1-⁵/₁₆" and a wall thickness of .150. Each upright is marked in two inch increments and fitted with plastic caps in each end.

CASTERS: -- Sold Separately Uprights can be fitted with four stem type 5" swivel casters, two with brake. Rated capacity per caster is 300#.



NSF Certified

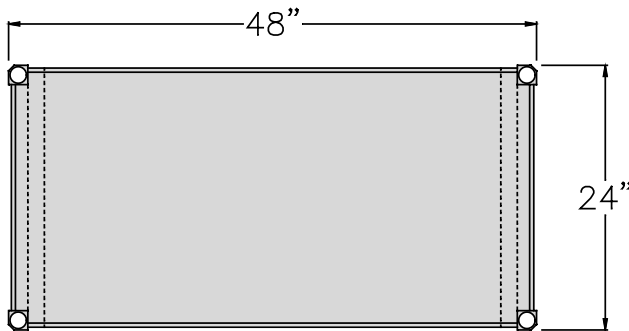

#2448S Shelf

Individual Solid Shelves

Model No.	Size D-L	Ship Wt.
° 1530S	15" x 30"	6#
° 1536S	15" x 36"	7#
° 1542S	15" x 42"	7.5#
° 1548S	15" x 48"	8#
° 1830S	18" x 30"	6.5#
° 1836S	18" x 36"	7.5#
° 1842S	18" x 42"	8#
° 1848S	18" x 48"	9#
° 2030S	20" x 30"	8#
° 2036S	20" x 36"	8.5#
° 2042S	20" x 42"	9#
° 2048S	20" x 48"	9.5#

° All Items Are UPS-able

Posts

Model No.	Length	Ship Wt.
° 12P	12"6#
° 34P	34"	2#
° 48P	48"	2.5#
° 54P	54"	3#
° 68P	68"	3.5#
° 72P	72"	3.5#
° 76P	76"	4#
° 84P	84"	4.5#

Capped aluminum pipe (1-⁵/₁₆" o.d.). Marked in 2" increments.

° All Items Are UPS-able