



Project: _____
 Location: _____
 Item #: _____
 Quantity: _____

Roll-in Freezers

| | | | | | |
|--|--|--|---|--|--------------------------------------|
| FIS MODELS — | FIS-1D-S7 FIS-2D-S7 FIS-3D-S7 | FISA MODELS — | FISA-1D-S7 FISA-2D-S7 FISA-3D-S7 | FIA MODELS — | FIA-1D-S7 FIA-2D-S7 |
| Stainless steel exterior and interior. | | Stainless steel exterior. Aluminum interior. | | Stainless steel fronts and doors. Aluminum sides and interior. | |



FIS and FISA Models

- Digital Thermometer/Battery Back-up

FIA Models

- Dial Thermometer

Standard Features (all models)

- Energy Saver Switch
- Stainless Steel Case Front and Door(s)
- Lifetime Cam Lift Hinges
- Lifetime Safety Grip Handle(s)
- Self-Closing Doors with Safety Stops
- Adjustable Wiper Gasket(s)
- Removable Ramps(s)
- Energy Saving Thermal Breaker Strips
- Door Opening Accepts Carts up to 27" w x 29" d x 64" h
- Heavy-Duty Cylinder Locks
- One Piece Self-Adjusting Magnetic Door Gaskets
- High Impact ABS Interior Door Liner
- Plasticized Fin Coil
- Environmentally Friendly R-404A Refrigerant
- Non-Electric Condensate Evaporator
- Automatic Defrost
- Stainless Steel Floor
- Cord and Plug Attached on 115V Models 12 Amps or Less

Optional Features and Accessories

- Dial or Digital Thermometer
- Hinged Glass Doors with Cylinder Locks
- Change Door Swing
- Shelf Pilaster Strips
- Adjustable Stainless Steel Wire Shelves
- Stainless Steel Angle Pan Slides
- Zinc Plated Wire Pan Slides
- Stainless Steel Case Back
- Remote and Roll-Thru Models

Note: All 2 & 3 section Roll-Thru models only have stainless steel interiors

Cabinet:

Each Victory cabinet is internally supported, braced and assembled into a single rigid unit. The cabinet front and doors are constructed of heavy gauge polished stainless steel to maintain an attractive appearance after years of heavy use. Foamed-in-place polyurethane insulation throughout the cabinet and doors ensures the ultimate in energy efficiency.

Doors:

The self-closing doors are securely mounted on rugged cam-lift hinges, which have a lifetime guarantee. Each door has a heavy-duty cylinder lock and self-adjusting magnetic gasket to prevent the cold air from escaping. Humidity control wires located around the door jamb prevent condensation from forming on the cabinet front and are concealed by a high impact, non-conductive thermal breaker strip. The interior door liner is constructed of durable ABS material, which resists denting and scratching and is

easy to clean. Each safety grip handle is guaranteed for life. Removable ramps are provided on the bottom of each door opening.

Refrigeration System:

All components of the self-contained refrigeration system are mounted on top of the cabinet. The air circulating fans and the forced convection-cooling coil are contained in an insulated housing separate from the product zone allowing for maximum food storage capacity. All condensate water is disposed of automatically by the energy efficient non-electric condensate evaporator, no plumbing is required.

Approvals:



Victory Refrigeration specification sheets are available online at www.victory-refrig.com.

| CHARACTERISTICS | ONE SECTION | | TWO SECTION | | THREE SECTION | |
|--------------------------------|--------------|--------------|--------------|--------------|---------------|-----------|
| | Roll-In | Roll-Thru | Roll-In | Roll-Thru | Roll-In | Roll-Thru |
| Width, Overall | 36 1/2 | 36 1/2 | 68 7/8 | 68 7/8 | 101 1/4 | 101 1/4 |
| Depth, Overall (incl. handles) | 35 7/8 | 39 3/8 | 35 7/8 | 39 3/8 | 35 7/8 | 39 3/8 |
| Height, Overall | 84 | 84 | 84 | 84 | 87 1/2 | 87 1/2 |
| Depth, Door(s) Open 90° | 65 1/4 | 98 1/8 | 65 1/4 | 98 1/8 | 65 1/4 | 98 1/8 |
| Depth Case Over Ramp | 35 1/2 | 38 1/2 | 35 1/2 | 38 1/2 | 35 1/2 | 38 1/2 |
| Clear Door Width | 27 3/4 | 27 3/4 | 27 3/4 | 27 3/4 | 27 3/4 | 27 3/4 |
| Clear Full Door Height | 65 1/4 | 65 1/4 | 65 1/4 | 65 1/4 | 65 1/4 | 65 1/4 |
| Capacity Net (cubic feet) | 33.6 | 36.2 | 67.2 | 72.4 | 100.9 | 108.6 |
| No. of Full Doors | 1 | 2 | 2 | 4 | 3 | 6 |
| Cabinet Voltage | 115/60/1 | 115/60/1 | 115/60/1 | 115/60/1 | 115/60/1 | 115/60/1 |
| Feed Wires | 3 | 3 | 3 | 3 | 3 | 3 |
| Condensing Unit Voltage | 208-230/60/1 | 208-230/60/1 | 208-230/60/1 | 208-230/60/1 | 230/60/1 | 230/60/1 |
| Condensing Unit Size (HP) | 3/4 | 1 | 1 | 2 | 2.5 | 2.5 |
| Total Amperes | 10.9 | 13.3 | 13.9 | 18.2 | 22.7 | 24 |

| Crated dim. & wts. | Ht. | Width | Depth | Cu.Ft. | Lbs |
|--------------------|-----|--------|--------|--------|------|
| One Section | 87 | 41 3/4 | 44 3/4 | 94.1 | 480 |
| Two Section | 87 | 74 5/8 | 44 3/4 | 168.1 | 840 |
| Three Section | 87 | 107 | 44 3/4 | 241.1 | 1210 |


Approximate Roll-Thru weights, add 15%

FOR REMOTE MODELS—Substitute an "R" for the "S" in suffix. For example: Model FIS-1D-S7 (self-contained) would be FIS-1D-R7 remote cabinet. Air circulating fans, expansion valve and plasticized coil are provided. Condensing units not supplied. The following units are recommended with 1/2" O.D. Suction line, 3/4" O.D. Liquid line.

| | REMOTE REFRIGERATION | | |
|---------------|----------------------|------|---------------|
| | Cond. Unit | BTUH | Cabinet Amps* |
| One Section | 2/3 H.P. | 2540 | 115/60/1 2.2 |
| Two Section | 1/2 H.P. | 4400 | 115/60/1 3.0 |
| Three Section | 3/4 H.P. | 5800 | 115/60/1 4.3 |

*(In Defrost) For Remote Roll-Thru—Consult factory

Dimensional tolerance ± 1/4" Metric dimensions (MM)

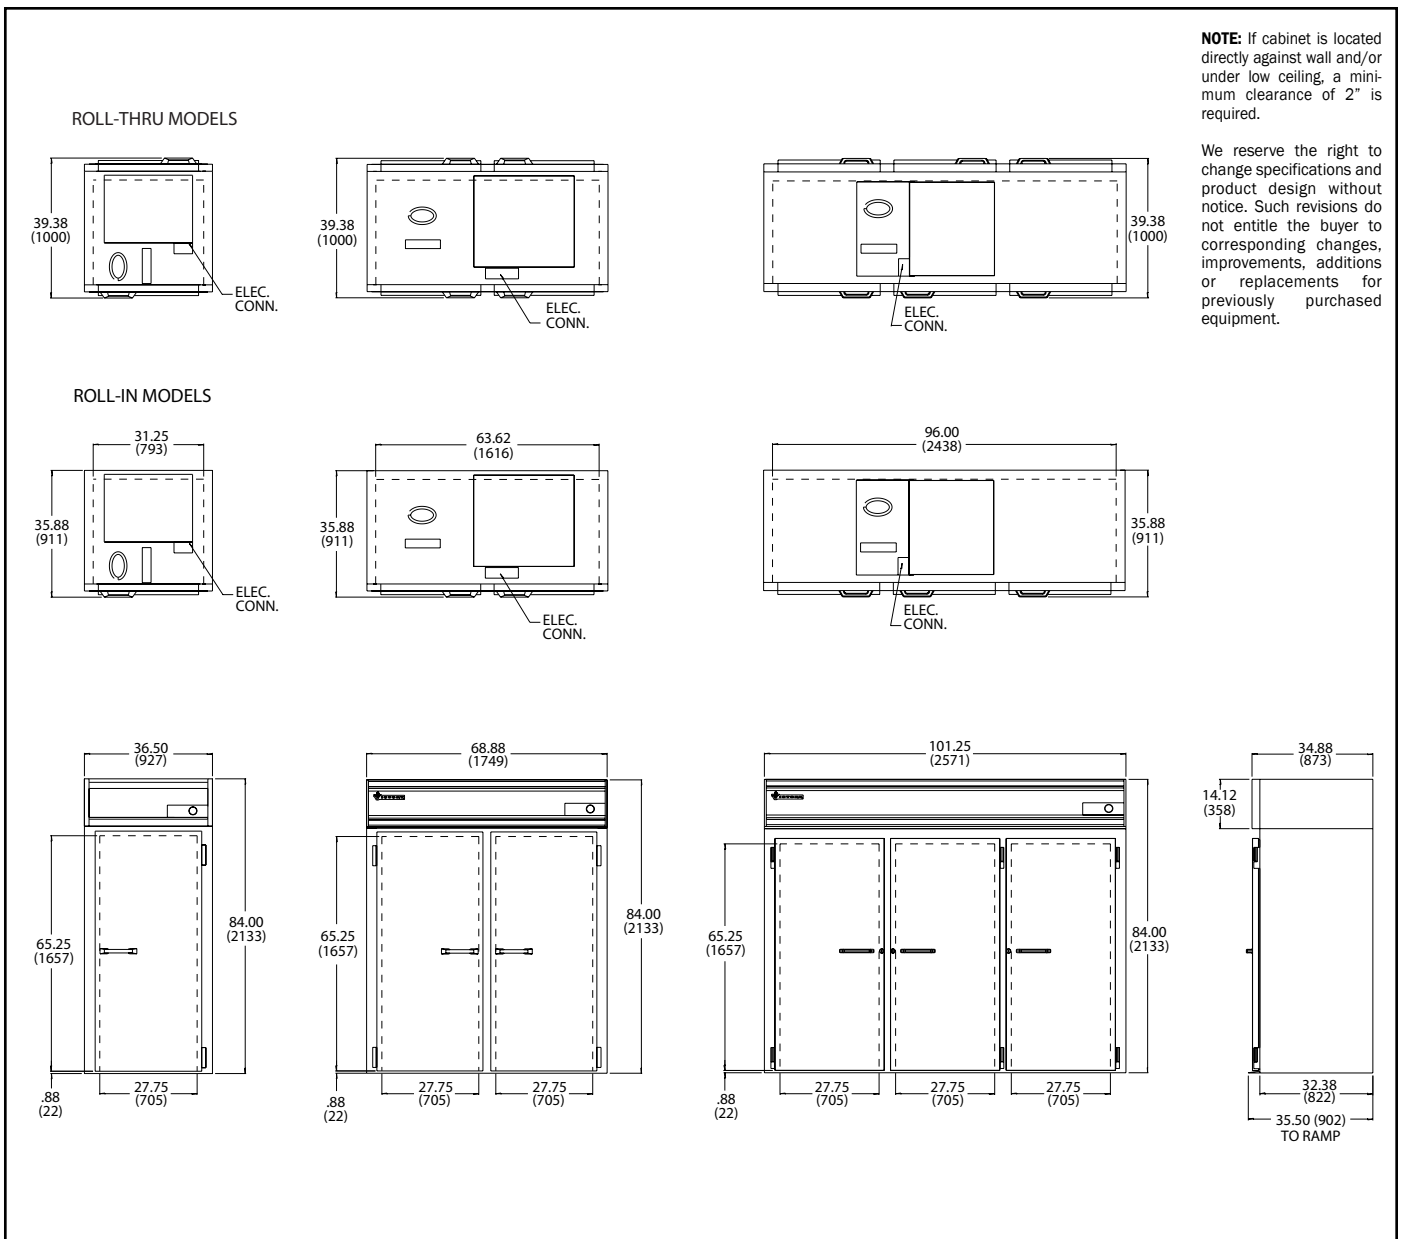

Continuous product development may necessitate specification changes and design without notice.



Victory participates in the KCL CADlog, the most current source of CAD symbols for foodservice designers worldwide. Symbols include standard equipment in plan, side, front and 3-D views, layered for FEDA/FCSI recommended guidelines.