

# CVap®

## HA4002 CVap® Holding Cabinet Half size, under counter model, fanless

Electronic differential control



### General Specifications


- CVap holding cabinets are designed for high quality holding of a wide variety of menu items for extended times.
- Exclusive patented Controlled Vapor Technology (U.S. patent # 5,494,690) establishes that the water vapor content in the cabinet is the same as that of the food. This unique process controls moisture evaporation and saturation, so crisp foods stay crisp, moist foods stay moist.
- Electronic differential controls are easy to understand and reliable. Never require field calibration. FOOD TEMP DIAL allows precise control of food temperature from 90 to 180°F (32 to 82°C). FOOD TEXTURE DIAL maintains just-cooked texture with settings labeled moist, soft moist, firm moist, and crisp. No guesswork required.
- Built to last with quality craftsmanship, high grade stainless steel construction and full insulation on top, sides and doors.
- Compact to fit under counters to save floor space. Ideal for ADA under counter size requirements.
- Features full perimeter door gaskets, magnetic door handle, lift-off door, removable side racks, and digital readout for water temperature.
- CVap equipment complies with all domestic, and most international requirements, such as UL, C-UL, UL Sanitation, CE, MEA, and others.

**Functions:** Proof & Hold

**Capacity:** 3 Steam Table Pans  
12" x 20" x 2.5"  
(305mm x 508mm x 64mm)

6 Half Steam Table Pans  
12" x 10" x 2.5"  
(305mm x 254mm x 62mm)

3x1/1 Gastronorm Pans



Winston Industries, LLC.



Winston Products International, Ltd.




# HA4002 CVap® Holding Cabinet

## Half size, under counter model, fanless

Electronic differential control

Buy Winston Service Parts  
Online!  
Factory direct at  
[www.winstonind.com](http://www.winstonind.com)

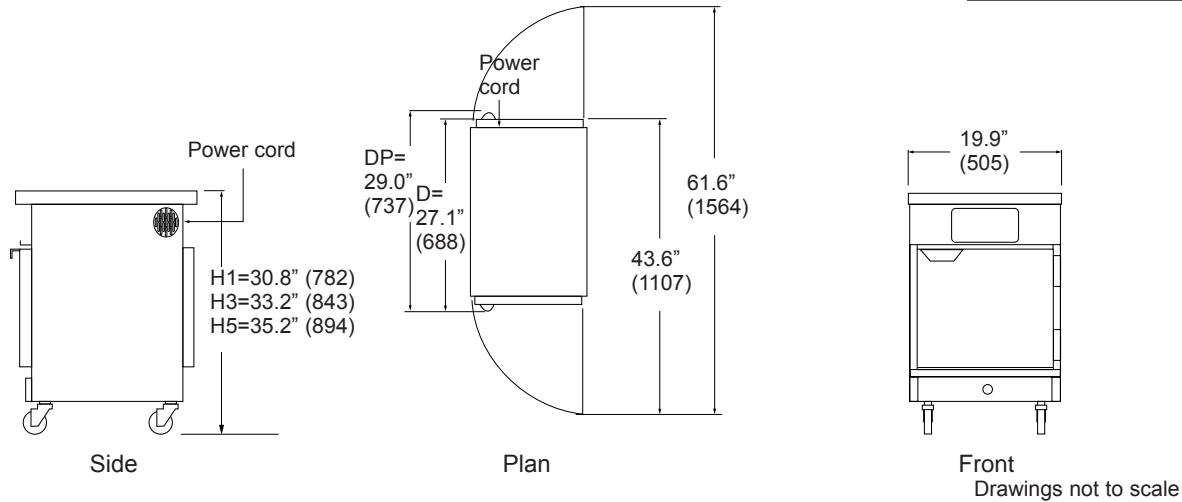

Capacity	Size in (mm)	Volts	Hertz	PH	Amps	Watts	Circuit Amps	Ship Wt lb (kg)	Ship Cube ft (M)	Class	NEMA Plug Type
3 STP 6 half STP 3x1/1 GP	H1 =30.8" (782) H3 =33.2" (843) H5 =35.2" (894) W =19.9" (505) D =27.1" (688) DP =29.0" (737)	<b>US/Canada</b>									
		120	60	1	17.0	2040	US 20 CAN 30	120 (54)	15.6 (0.44)	100	5-20P United States
		<b>International</b>									
		230*	50	1	8.8	2024	N/A	w/skid 145 (65)	w/skid call factory	N/A	5-30P Canada

STP=Steam Table Pan (12"x2-"x2.5") • GP=Gastronorm Pan • H1=Height w/1" wheels • H3=Height w/3" casters • H5=Height w/5" casters • DP=Depth w/Pass thru

### Short Form Specs

Shall be Winston CVap holding cabinet, model HA4002 with electronic differential control to provide precise food temperature from 90 to 180°F (32 to 82°C) and maintain food texture with settings labeled proof, very moist, firm moist, and crisp. Utilizes Controlled Vapor Technology (patent #5,494,690) as a method and apparatus for holding hot foods, consisting of an air heater and water heater to establish ideal water vapor content that is in relation with the moistness characteristics for the food.

### Construction

**Materials:** To be commercial and institutional grade stainless steel to provide ease of cleaning and long service life with reasonable use and care.

**Rack supports:** Adjustable, normally spaced 3.5" (89mm), to receive 3 steam table pans, 6 half steam table pans, or 3 x 1/1 gastronorm pans. Removable for easy cleaning.

**Doors:** Field reversible hinges to allow door lift off to facilitate cleaning. Magnetic door handle.

**Casters:** Includes 2 locking, 2 non-locking, heavy duty, non-marking.

**Insulation:** Full-perimeter.

**Controller:** Electronic differential control with dials labeled Food Temp and Food Texture.

**Water fill:** Operated manually. Low mineral potable water is recommended, otherwise use deionizer/demineralizer to minimize corrosive damage.

**Ventilation:** Allow 2" (51mm) ventilation clearance on sides, back, and top of appliance. Install with supplied legs or casters. Refer to use & care manual for specific installation instructions. Generally this appliance does not need to be installed under a mechanical ventilation system (vent hood). Check local health and fire codes for requirements specific to your location.

**Electrical:** Supplied with 7' (213cm) (minimum) power cord and plug.

**Load limit:** 65 lbs. (29.25 kg) per rack.

### Warranty:

Limited 1 year warranty (excluding gaskets, lamps, hoses, power cords, glass panels, and evaporators). Warranty disclaimer for failure to clean. Ask for complete warranty disclosure.

### Model

HA4002

### Description

CVap hold/proof

Customer should specify the following when ordering:

1. Hinge preference (left or right) (no additional cost).
2. Wheel or caster preference.
3. Any added options or accessories.

\* Inquire about additional international voltages available.

### Options

Wheels/Casters	Choice of 1" (25mm) wheels or 3" (76mm) casters. 5" (127mm) casters are optional upgrade.
Pass Thru Window	Second door on back of cabinet.
Solid rack supports	Solid stainless steel rack supports (replaces standard wire rack supports).
Automatic water fill system	
Extended Warranty	Adds parts and labor warranty coverage for one additional year.

### Accessories

PS2192/12	ScaleKleen™ packets (12 pack)
PS2428	Stack kit w/air space, heavy duty
PS2696	Mobile water removal system

Options and accessories available for an additional cost.

Winston Industries, LLC.



Winston Products International, Ltd.

2345 Carton Drive • Louisville, KY 40299 USA • (800) 234-5286 • (502) 495-5400 • Fax: (502) 495-5458 • [www.winstonind.com](http://www.winstonind.com)

Printed in USA.

Specifications subject to change without notice.

4272V024 Rev 19  
rs 6-17-08